


FML



TECHNICAL SPECIFICATIONS:

- :: Construction: Spun aluminum with white powder coat finish
- :: LED: Seoul DOB (Driver On Board) Technology
- :: Gasket: close cell Neoprene foam gasket
- :: Optics: White translucent acrylic lens
- :: 1" deep
- :: Voltage: 120V AC
- :: Dimmable down to 10% using an approved dimmer
- :: Power factor: 90% +
- :: Suitable for damp locations when gasket is used
- :: Maximum Ambient Temperature: 104°F
- :: ETL-listed
- :: Energy Star-rated

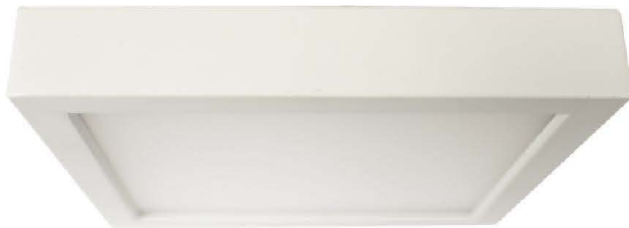

C17

LED FLUSH MOUNT FIXTURES

LED FLUSH MOUNT FIXTURES

CATALOG NO.	SIZE	WATTS	COLOR TEMP	LUMENS	SHAPE
FML-R6-11K-30K	6" Diameter	11W	3000K	550LM	ROUND
FML-R6-11K-50K	6" Diameter	11W	5000K	550LM	
FML-R8-14K-30K	8" Diameter	14W	3000K	750LM	
FML-R8-14K-50K	8" Diameter	14W	5000K	750LM	
FML-R10-17K-30K	10" Diameter	17W	3000K	950LM	
FML-R10-17K-50K	10" Diameter	17W	5000K	950LM	
FML-S6-11K-30K	6" x 6"	11W	3000K	550LM	SQUARE
FML-S6-11K-50K	6" x 6"	11W	5000K	550LM	
FML-S8-14K-30K	8" x 8"	14W	3000K	750LM	
FML-S8-14K-50K	8" x 8"	14W	5000K	750LM	
FML-S10-17K-30K	10" x 10"	17W	3000K	950LM	
FML-S10-17K-50K	10" x 10"	17W	5000K	950LM	

