

# LF5

## 380W

120~277V & 480V




### TECHNICAL SPECIFICATIONS:

- :: Housing: Die-cast aluminum housing with powder coat finish (Dark Bronze)
- :: Mounting yoke provided in the package, not installed
- :: Voltage: 120~277V & 347~480V
- :: 0~10V dimming
- :: TIR optic lens - TYPE III (TYPE II & IV by request)
- :: 6" SJTW 18/3 AWG cable
- :: Power Factor: .9~.97
- :: Operating Temp:-4°F to 104°F
- :: Up to 110 lumens per watt
- :: CRI: 82~84
- :: 70,000 hour rated life
- :: Suitable for Wet Locations, IP65

### APPLICATIONS:

- :: Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- :: Great for use with motion sensors or other instant on/off controls

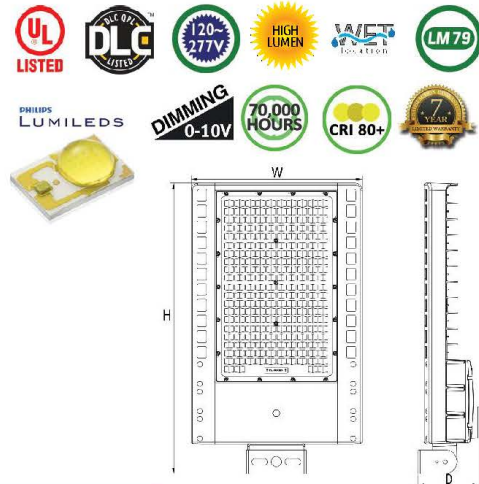

## LF5 SERIES WITH MOUNTING OPTIONS

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	VOLTAGE	DIMENSIONS
LF5-380CW-YK	380W	46000LM	5000K	1000~1200 MH	120-277V	21.7"(H) x 14.2"(W) x 4.7"(D)
LF5-380CW-480V	380W	46000LM	5000K	1000~1200 MH	347-480V	
LF-AD-SF	Slips onto pole top 2" Dim. Fixture mounts directly on the side or top of this device					
LF5-EXTARM	Used to mount fixture directly on side of square poles. discard mounting yoke when this mounting is used. For round poles use PSR4 adapter (see accessories page).					



**LF-AD-SF**  
Slip Fitter Adapter



**LF5-EXTARM**  
Extension Arm Adapter

