

JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_


TYPE: \_\_\_\_\_



Surface Mount  
Bracket Included

**DIMENSIONS:**

47.70" (L) X 23.70" (W) X 1.09" (H)

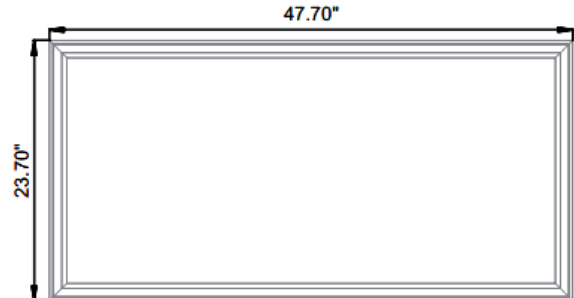

- LPS-2X4-50K-D**
- LPS-2X4-40K-D**
- LPS-2X4-30K-D**

**LED SURFACE MOUNT PANELS**

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120-277VAC 50/60Hz
- Wattage: 50W
- Power factor: >0.95
- Efficacy: 110LM/W

**HOUSING SPECIFICATIONS:**

- White Finish
- Internal Driver
- Mounting Options: Surface mount, Recessed Mount
- Operating temperature: -13°F ~ 104°F
- Lifespan: 50,000 hrs.
- Suitable for Damp Locations

**CERTIFICATIONS:** DLC, ETL



MODEL	WATTS	VOLTAGE	LUMENS UP/DOWN	COLOR TEMP
LPS-2X4-50K-D	50W	120~277VAC	5500LM	5000K
LPS-2X4-40K-D	50W	120~277VAC	5500LM	4000K
LPS-2X4-30K-D	50W	120~277VAC	5500LM	3000K

**OPTIONAL ACCESSORY:**



LPS-JBOX

MODEL	DESCRIPTION
LPS-JBOX	Optional Junction Box for T-Bar installation

**LIGHTING SPECIFICATIONS:**

- Dimming: 0~10V Dimmable
- Recommended Dimmers: DIVA-DVTV(LUTRON), NOVA T NTSTV-DV(LUTRON), IP710-DL(LEVITON)
- Total lumens: 5500LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >80

**WARRANTY:** 5 years

