

# LRS SERIES Outdoor Lighting

LRS-E-MCT-C90-MGBR

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

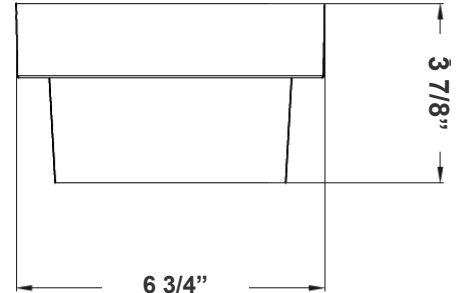

6 3/4"(W) x 3 7/8"(H)

LED architectural wall light with dual lens is ideal for commercial and residential outdoor, vanity, and indoor lighting.

## Features

- Back plate: Die-cast aluminum
- Dual Polycarbonate Lens
- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 12W
- Power Factor: >0.90
- Efficacy: 54 LPW

### Mechanical:

- Back plate: Die-Cast Aluminum with Mounting/Gasket Installed
- Marine-Grade Bronze Finish,
- This Process Consists of:
  1. Abrasive Blasting
  2. Chemical Conversion Coat IAW TTC
  3. Epoxy Primer and SDTGIC Polyester Top Coat With 200-Hour on Salt Spray Test
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP44

### Lighting:

- Total Lumens: 650LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

### Applications:

- Ideal for general site lighting, loading docks, doorway, pathway and parking areas.

## Other Models:

• 12W | 650LM | LRS-E-MCT-C90-BK

• 12W | 650LM | LRS-E-MCT-C90-WH




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemg.com | www.westgatecontrols.co




WG-ZY-29-2Z

**Photometrics:** LRS-E-MCT-C90-MGBR

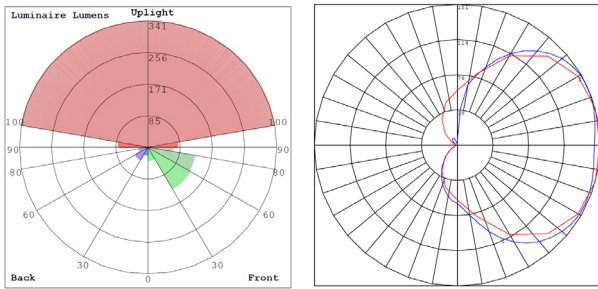

BUD Rating: B0-U3-G1

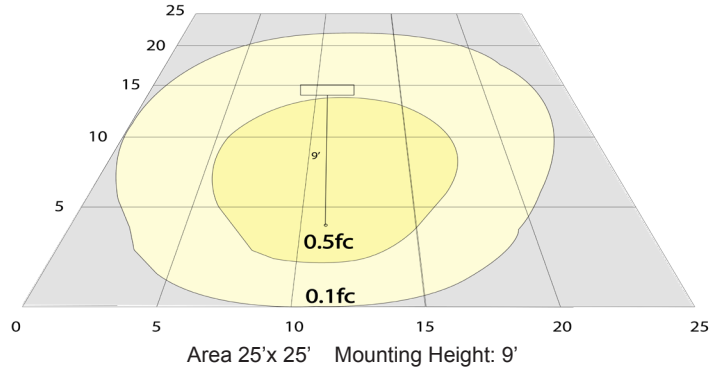

**Other Views:**



Side View



Front View



Back View

**Performance Table:** LRS-E-MCT-C90-MGBR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-E-MCT-C90-MGBR	12W	120~277V	650LM	3000K 4000K 5000K	B0-U3-G1	54

**Sample Ordering**

Model	Color Temp.	CRI	Housing	
LRS	E	MCT	C90	MGBR

**Other Models:**



LRS-E-MCT-C90-BK



LRS-E-MCT-C90-WH

