

LRS SERIES Outdoor Lighting

LRS-G-MCT-C90-MGBR


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Customer Name: _____

Project Name: _____

Note: _____ Type: _____

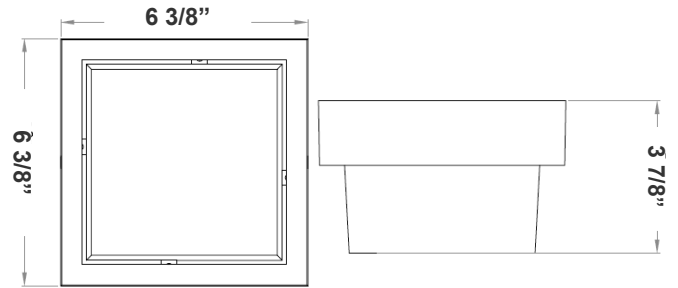

6 3/8" (L) x 6 3/8" (W) x 3 7/8" (H)

LED architectural wall light with dual lens is ideal for commercial and residential outdoor, vanity, and indoor lighting.

Features

- Back plate: Die-cast aluminum
- Dual Polycarbonate Lens
- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 12W
- Power Factor: >0.90
- Efficacy: 54 LPW

Mechanical:

- Back plate: Die-Cast Aluminum with Mounting/Gasket Installed
- Marine-Grade Bronze Finish,
- This Process Consists of:
 1. Abrasive Blasting
 2. Chemical Conversion Coat IAW TTC
 3. Epoxy Primer and SDTGIC Polyester Top Coat With 200-Hour on Salt Spray Test
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP44

Lighting:

- LED Type/Brand: SMD 3030/ Philips Lumileds LEDs
- Total Lumens: 650LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

Applications:

- Ideal for general site lighting, loading docks, doorway, pathway and parking areas.

Other Models:

- 12W | 650LM | LRS-G-MCT-C90-WH
- 12W | 650LM | LRS-G-MCT-C90-BK




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-ZY-29-2Z

Photometrics: LRS-G-MCT-C90-MGBR

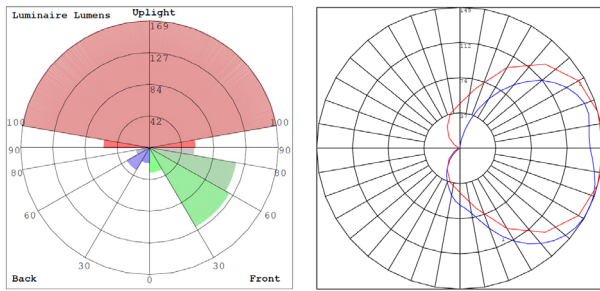

BUD Rating: B0-U3-G1

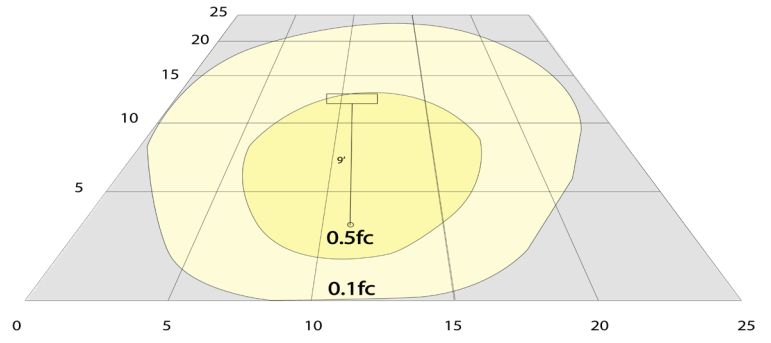

Area 25' x 25' Mounting Height: 9'


Other Views:



Side View



Front View



Back View

Performance Table: LRS-G-MCT-C90-MGBR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-G-MCT-C90-MGBR	12W	120~277V	650LM	3000K 4000K 5000K	B0-U3-G1	54

Sample Ordering

Model	Color Temp.	CRI	Housing
LRS - G - MCT - C90 - MGBR			

Other Models:



LRS-G-MCT-C90-BK



LRS-G-MCT-C90-WH

