

**LLVT**  
**MCT<sub>3</sub>**



Shown with clear lens (Included)

**TECHNICAL SPECIFICATIONS:**

- :: Housing: Bayer® Brand Polycarbonate
- :: MCT: Multi Color Temperature (Selectable Switch Inside Fixture)
- :: Lens: Clear PC Lens
- :: With stainless steel clamps
- :: Stainless Steel Mounting Brackets Incorporated on the Back
- :: LED SMD type: Edison 2835
- :: Driver: ARCATA/ANTRON
- :: Dimmable (0~10V dimming)
- :: Housing: Polycarbonate
- :: Input Voltage: 120V & 480V AC
- :: Power Factor: >0.98
- :: Operating Temp: -22°F to 110°F
- :: 50,000 Hours Rated Life
- :: Suitable for Wet Locations, IP65
- :: 5-year warranty

**FEATURES:**


- :: Ideal for offices, retail stores, showrooms and residential applications. Specially suited for areas where accessing the fixture is challenging.



**Optional Accessories**



Optional Motion Sensors (Not Included) See Page A57

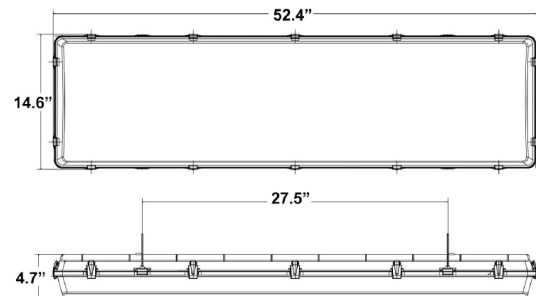

**LED LINEAR VAPOR LIGHTS (100-150W)**

CATALOG NO.	WATTS	LPW	COLOR TEMP	DIMENSIONS
LLVT-4FT-100W-40K-D	100W	135LM/W	4000K	52.4"(L) x 14.6"(W) x 4.7"(H)
LLVT-4FT-100W-50K-D	100W	135LM/W	5000K	52.4"(L) x 14.6"(W) x 4.7"(H)
LLVT-4FT-150W-40K-D	150W	135LM/W	4000K	52.4"(L) x 14.6"(W) x 4.7"(H)
LLVT-4FT-150W-50K-D	150W	135LM/W	5000K	52.4"(L) x 14.6"(W) x 4.7"(H)
LLVT-4FT-100W-MCT-D	100W	120LM/W	3500K/4000K/5000K	52.4"(L) x 14.6"(W) x 4.7"(H)
LLVT-4FT-150W-MCT-D	150W	135LM/W	3500K/4000K/5000K	52.4"(L) x 14.6"(W) x 4.7"(H)
LLVT-4FT-100W-MCT-D-480V	100W	135LM/W	3500K/4000K/5000K	52.4"(L) x 14.6"(W) x 4.7"(H)
LLVT-4FT-150W-40K-D-480V	150W	135LM/W	4000K	52.4"(L) x 14.6"(W) x 4.7"(H)
LLVT-4FT-150W-50K-D-480V	150W	135LM/W	5000K	52.4"(L) x 14.6"(W) x 4.7"(H)
LLVT-4FT-RL2C	Optional Replacement Clear Lens for LLVT			
LLVT-4FT-RL2T	Optional Replacement Frosted Lens for LLVT			

**C10**