


T8 SERIES COMMERCIAL INDOOR LIGHTING

T8-HL-8FT-40W-40K-C
T8-HL-8FT-40W-50K-C



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

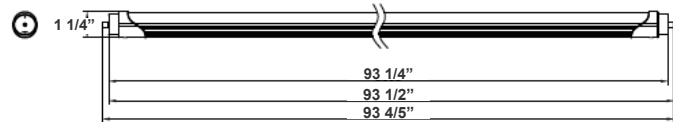

93 4/5"(L) X 1 1/4" (D)

Crystal Glass T8 Tube switches from fluorescent tubes to LED, giving more cost efficiency by providing the same amount of lumen output with less energy consumption. The LED tube offers a soft and bright light distribution.

Features

- Type B: Ballast Override (AC Direct), Connect One End or Both Ends (Dual Function) - UL No. E342884
- 5-Year Warranty
- Aluminum base and polycarbonate (PC) lens

Technical Specifications

Electrical:

- Voltage: 120-277V; 50/60Hz AC
- Power Factor: >0.90
- THD: <20%
- Wattage: 40W
- Efficacy: 115 LPW

Lighting:

- Dimming: Non Dimmable
- Total Lumens: 4600LM
- Color Temperatures: 4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 120°

Mechanical:

- Base Type: FA8 (Single Pin)
- Clear PC Lens
- Aluminum Housing & PC lens
- Ambient Operating Temperature: -13°F to 113°F
- Rated life: 50,000 hrs
- IP Rating: IP20 (Indoor)

Applications:



- Crystal Glass T8 Tube switches from fluorescent tubes to LED, giving more cost efficiency by providing the same amount of lumen output with less energy consumption. The LED tube offers a soft and bright light distribution.

Other Models:


- 40W | 4600LM | T8-HL-8FT-40W-40K-F
- 40W | 4600LM | T8-HL-8FT-40W-50K-F



Photometrics: T8-HL-8FT-40W



BUG Rating: B3-U3-G1

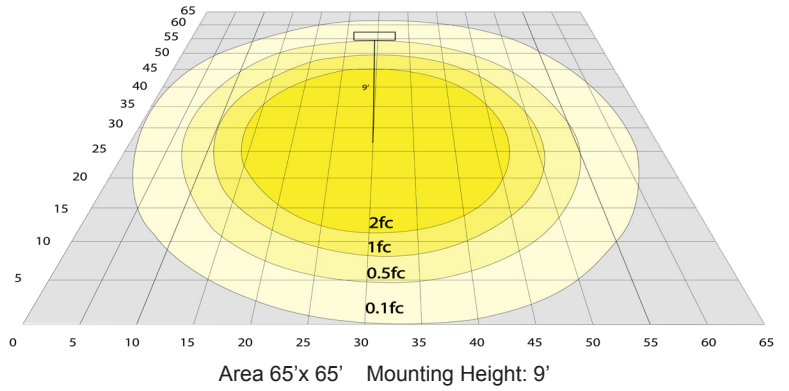

Other Views:



Socket View



Front View



Back View

Performance Table: T8-HL-8FT-40W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
T8-HL-8FT-40W-40K-C	40W	120-277V	4600LM	4000K	3-3-1	115
T8-HL-8FT-40W-50K-C	40W	120-277V	4600LM	5000K	3-3-1	115

Sample Ordering

Model	Size	Watt	Color Temp.	Lens Type
T8	HL	8FT	40W	C

40K = 4000K
50K = 5000K



Example:

1. T8-HL-8FT-40W-40K-C

(FOR 40W 4000K T8 8FT TUBE LAMP 120-277V)

WIRING DIAGRAM:

Type B



Other Models: T8-HL-8FT-40W-F (Frosted Model)



Socket View



Front View



Back View